

LED Gooseneck Light
with Bolt-Thru & Clamp Mounting

LED Gooseneck G1300/G2300

LED Gooseneck Light with Bolt-Thru & Clamp Mounting

PRODUCT HIGHLIGHTS

- 5 Watts
- 120/240V AC Input
- 24° Beam Angle
- Aluminum Housing
- Two Mounting Options
- Flexible Adjustment

TYPICAL APPLICATIONS

- Retail
- Display
- Server
- Workstation
- Trade Show

SPECIFICATIONS

SUITABLE ENVIRONMENTS



Dry Damp

LED COLORS

- Cool White
- Neutral White
- Warm White

FINISH




Silver

BEAM ANGLE




24°

MOUNTING

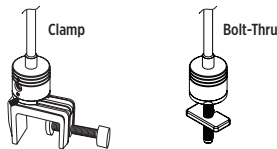

CERTIFICATIONS

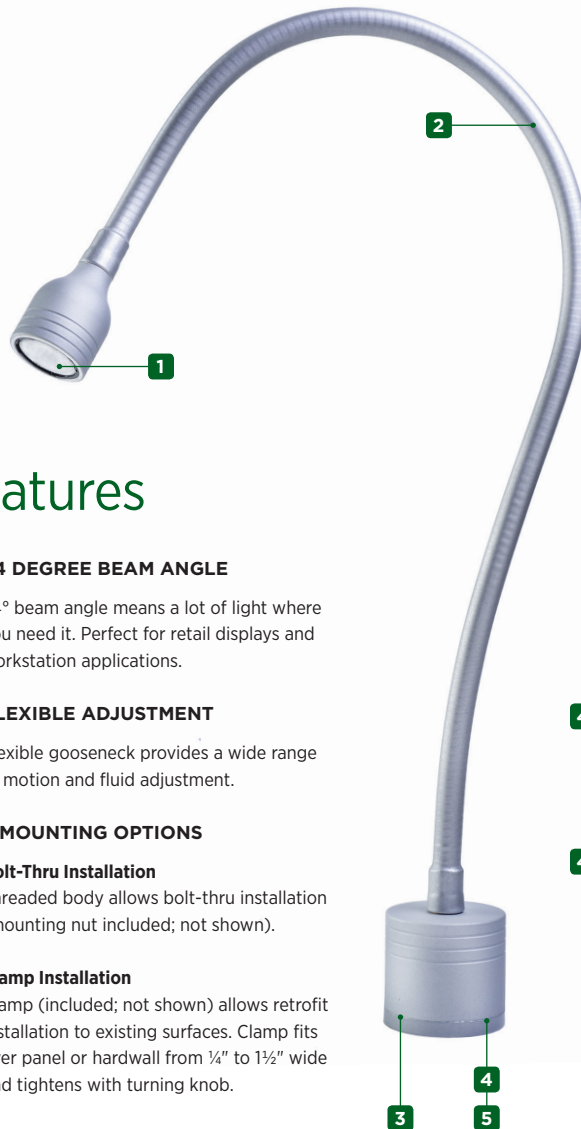UL-Recognized
Power Supply

Features

1 24 DEGREE BEAM ANGLE

24° beam angle means a lot of light where you need it. Perfect for retail displays and workstation applications.

2 FLEXIBLE ADJUSTMENT

Flexible gooseneck provides a wide range of motion and fluid adjustment.

3 2 MOUNTING OPTIONS

Bolt-Thru Installation

Threaded body allows bolt-thru installation (mounting nut included; not shown).

Clamp Installation

Clamp (included; not shown) allows retrofit installation to existing surfaces. Clamp fits over panel or hardwall from ¼" to 1½" wide and tightens with turning knob.

4 CONNECTORIZED

Fixture is configured with a connector for simple plug-and-play installation.


4 120/240 WALL PLUG

One 120/240V wall plug (not shown) included with each fixture.

SPECIFICATIONS

ITEM	PARAMETER	VALUE
Electrical	Input Power	5 Watts*
	Input Voltage Range	120/240V AC Input via included Wall Plug Power Supply
	0-100% Dimming	
Optical	Emitting Angle	24° Angle
	LED Color	Cool White, Neutral White, Warm White
	LED Colors per Fixture	1
	Class	Class 2 LED Product
Physical	Dimensions	Refer to drawings on right
	Housing Construction	Aluminum
	Lens Material	Acrylic
	Finishes	Silver
	Mounting Method	Bolt-Thru or Clamp
	Operating Temp. Range	0°C to 30°C, Max. Case Temp (Tc): 50°C
	Humidity	0 to 95%, non-condensing
	Environment	Dry, Damp
	Certification	UL-Recognized Power Supply

DIMENSIONS - BOLT-THRU INSTALLATION

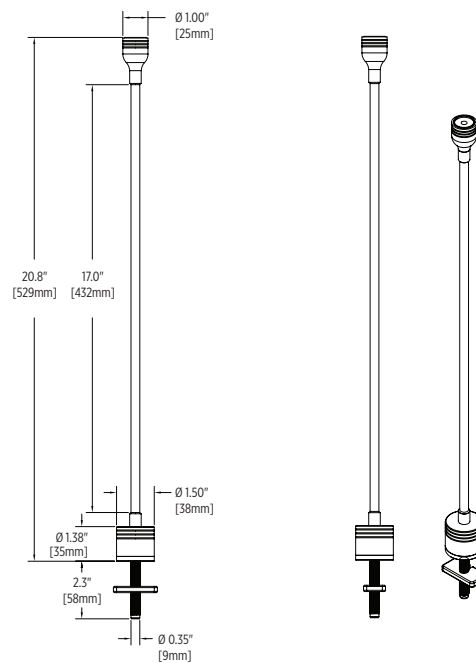


ORDERING NUMBER - BOLT-THRU INSTALLATION

FIXED FACTORY NUMBER EXAMPLE: **G1300Z-1024CXXX**
 USER SELECTED OPTION 18" Neck, Silver Finish, 24° Beam Angle, Warm White LED

G1300Z - **1** **0** **24** ***** **XXX**

Neck Length 18" Finish/Color Silver Beam Angle 24 Degree LED Color A Cool White B Neutral White C Warm White

DIMENSIONS - CLAMP INSTALLATION

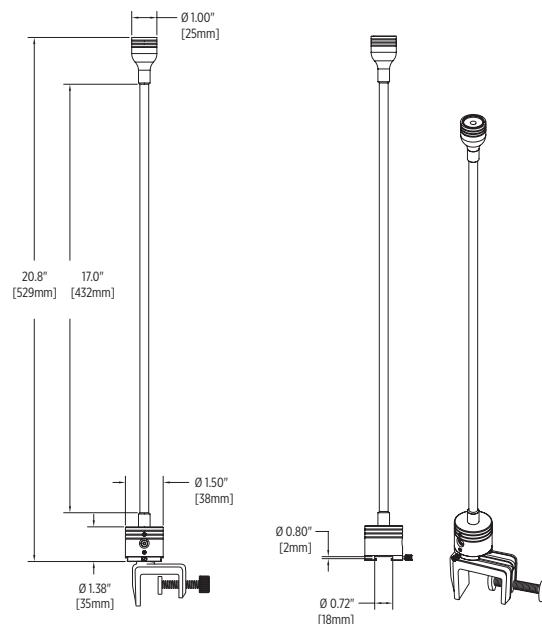

ORDERING NUMBER - CLAMP INSTALLATION

FIXED FACTORY NUMBER EXAMPLE: **G2300Z-1024CXXX**
 USER SELECTED OPTION 18" Neck, Silver Finish, 24° Beam Angle, Warm White LED

G2300Z - **1** **0** **24** ***** **XXX**

Neck Length 18" Finish/Color Silver Beam Angle 24 Degree LED Color A Cool White B Neutral White C Warm White