



# Gen2™ Grazer

**MODEL V2355 | LED LINEAR LUMINAIRE | WET LOCATION†**

Gen2 is an architectural-grade, wet-location LED luminaire engineered for the illumination and grazing of walls and surfaces, with perfect continuous light and plug-together design.

US 8,255,487 | US 8,264,172  
Additional Patents Pending



## FIXTURE BUILDER

V2355	B	-	1		<b>OPTIONS</b> Select one of each option below
<b>FIXTURE TYPE</b> Gen2 Grazer *factory defaults	<b>OUTPUT</b> B Standard 7W / Ft	<b>LENGTH</b> 1 12" 2 24" 3 36" 4 48"	<b>BEAM ANGLE</b> 1 10° See Gen2 Washer for additional beam angles.	<b>LED COLOR</b> AAH Cool White – 6500°K AAG Cool White – 5700°K* AAF Cool White – 5000°K BBE Neutral White – 4500°K BBD Neutral White – 4000°K* CBC Warm White – 3500°K CBB Warm White – 3000°K* CBA Warm White – 2700°K	<b>LOCATION</b> <input type="checkbox"/> Outdoor* <input type="checkbox"/> Indoor <b>FINISH</b> <input type="checkbox"/> Black Anodize* <input type="checkbox"/> Clear Anodize

## ACCESSORIES

DIMMING CONTROL	POWER BOXES	CONNECTORS & CABLES	BRACKETS & BAFFLES									
<b>LIGHTLINK</b> <input type="checkbox"/> LL-205-10V 0-10V Bridge & Dimmer  <b>DIMMING CABLE</b> <input type="checkbox"/> 685-01561-100 Indoor, 100ft, Plenum <input type="checkbox"/> 685-02026-100 Outdoor, 100ft, Water/UV	<b>INDOOR / OUTDOOR</b> <table border="1"> <thead> <tr> <th></th> <th>VOLTAGE</th> <th>POWERS</th> </tr> </thead> <tbody> <tr> <td><input type="checkbox"/> E10PW 280W</td> <td>120-277V AC</td> <td>40 ft</td> </tr> <tr> <td><input type="checkbox"/> E10PW 560W*</td> <td>120-277V AC</td> <td>40 ft x 2</td> </tr> </tbody> </table> <p>*dual output</p>		VOLTAGE	POWERS	<input type="checkbox"/> E10PW 280W	120-277V AC	40 ft	<input type="checkbox"/> E10PW 560W*	120-277V AC	40 ft x 2	<b>INPUT &amp; PLUG-TOGETHER</b> <input type="checkbox"/> 685-01859-6 6 ft, Input Cable <input type="checkbox"/> 720-01868 End-to-End Connector <input type="checkbox"/> VLAK2-P1 End Plug (for last light)  <b>EXTENSION CABLES</b> <input type="checkbox"/> 685-01670-1 1 ft Extension <input type="checkbox"/> 685-01670-3 3 ft Extension <input type="checkbox"/> 685-01670-10 10 ft Extension	<b>BRACKETS</b> <input type="checkbox"/> VLA-13 Adjustable <input type="checkbox"/> VLA-9 Fixed  <b>EXTENDED BRACKETS (VLA-17 INCLUDED)</b> <input type="checkbox"/> VLAX1-6 6" Adjustable <input type="checkbox"/> VLAX1-12 12" Adjustable  <b>BAFFLES (INDOOR ONLY)</b> <input type="checkbox"/> Black 810-02305-xxB <input type="checkbox"/> White 810-02305-xxW xx = fixture length
	VOLTAGE	POWERS										
<input type="checkbox"/> E10PW 280W	120-277V AC	40 ft										
<input type="checkbox"/> E10PW 560W*	120-277V AC	40 ft x 2										


## QUICK SPECS

<b>Input Voltage</b>	20-30V DC	<b>Humidity</b>	0 to 95% Non Condensing
<b>Power / Ft</b>	7 Watts	<b>CRI</b>	85 typ.
<b>Lumens / Ft</b>	390 lms typ. @ 3000°K	<b>Max. Plug-Together</b>	40 Feet of Fixtures @ 30V DC
<b>Efficiency</b>	56 lms / W typ. @ 3000°K	<b>Max. Wire Distance</b>	100 Feet from Last Light to Power Box using 12 AWG
<b>Operating Temp</b>	-20°C to 40°C	<b>Housing</b>	Mil-Spec Anodized Aluminum
<b>Max. Case Temp</b>	50°C	<b>Lens</b>	UV Resistant Acrylic



## PHOTOMETRICS

48" GEN2 GRAZER (V2355B-41CBB) RESULTS

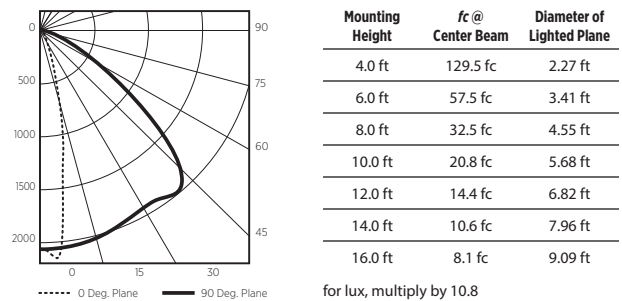

<b>Multiplier Table</b>	<b>3000°K</b>	<b>4000°K</b>	<b>5700°K</b>	Results as shown are calculated at 1/2 the measured intensity of the Gen2 Grazer HO and are for reference only.
Gen2 Grazer		x1.05	x1.10	

For complete technical information refer to the Gen2 Installation Guide available at [www.i2Systems.com](http://www.i2Systems.com)



355 Bantam Lake Rd.  
Morris, CT 06763 USA

[www.i2Systems.com](http://www.i2Systems.com)

tel +1.860.567.0708  
fax +1.860.567.2501

[sales@i2Systems.com](mailto:sales@i2Systems.com)

© 2012 Integrated Illumination Systems, Inc. All Rights Reserved. i2Systems, the i2Systems Logo, Gen2 and LightLink are either registered trademarks or trademarks of i2Systems. Due to ongoing improvement and innovation, product details and specifications are subject to change without notice.

092-02332

†Product specified as "Outdoor" is rated for exterior applications, however it is not rated for submersible applications and should not be mounted in conditions where there is, or is a possibility of, standing water. When installing in wet or damp locations, it is good practice to seal all fixtures and junction boxes with electronics-grade RTV silicone sealant to ensure that moisture cannot enter or accumulate in wiring compartments, cables, or other electrical parts. Product should not be installed in extreme locations, including but not limited to those outside of its temperature/humidity rating, environments subject to greater-than-average temperature shifts, and/or applications where product is subject to water runoff or downspouts. For more information, please refer to the Gen2 Installation Guide available at [www.i2Systems.com](http://www.i2Systems.com).