

LED Recessed Light for Accent Lighting,
9 LED Colors Available



Apeiron A1100

LED Recessed Light for Accent Lighting, 9 LED Colors Available

PRODUCT HIGHLIGHTS

- 2 Watts
- 9-30V DC Input
- 9 Vibrant Color Options
- 3" Diameter
- Stainless Steel Construction
- Exterior Rated

TYPICAL APPLICATIONS

- Marine Hardtop / Helm
- Automated Equipment Lighting
- Food Service Lighting
- Wine Cellar Lighting
- Furniture / Millwork Lighting
- Soffit Lighting

SPECIFICATIONS

SUITABLE ENVIRONMENTS



LED COLORS

- | | | |
|----------------------------------|----------------------------------|----------------------------------|
| <input type="radio"/> Cool White | <input type="radio"/> Blue | <input type="radio"/> Red |
| <input type="radio"/> Warm White | <input type="radio"/> Royal Blue | <input type="radio"/> Red-Orange |
| <input type="radio"/> Green | <input type="radio"/> Cyan | <input type="radio"/> Amber |

BEZEL FINISHES


PVD Coated:

- Polished Chrome
- Polished Gold
- Brushed Nickel

Powder Coated:

- White
- Off-White

BEZEL SHAPES



BEAM ANGLES



CERTIFICATIONS



Features

■ ADVANCED OPTICAL SYSTEM

120° full angle. Even light, no LED "dots" or pixilation.

■ 0 TO 100% DIGITAL DIMMING

Connection with i2Systems LightLink Series allows simple and seamless integration to most of today's conventional dimming systems.

■ RUGGED DESIGN

Stainless steel / anodized aluminum construction, sealed design, and electronic regulation to the LED source ensure product longevity.

■ NO HEAT OR UV IN THE LIGHT BEAM

With no heat in the light beam, the fixture lens remains much cooler than halogen sources, allowing safe and 'burn free' operation. In addition, no UV means reduced risk of fading or deteriorating products or artifacts on display.

■ STAINLESS STEEL TRIM, WITH PVD

Round, square or square/square, five finish options. Physical Vapor Deposition (PVD) coating provides a very durable surface finish which will not tarnish or discolor.

■ SPRING CLIP MOUNTING

Spring clip mounting offers simple installation while ensuring a secure fit when installed in dynamic applications.

Exclusive Technology

■ SMARTDRIVER™ INTEGRATED

i2Systems SmartDriver technology is integrated directly inside of every fixture. Connect the Apeiron to a wide range of voltages without sacrificing light output or lifetime. No external drivers are required and wiring is made simple.

■ LIGHTLINK™ COMPATIBLE

i2Systems LightLink controllers represent the next generation in lighting control and connectivity. LightLink modules provide seamless integration of today's commercial and residential dimming systems through a wide variety of desirable interfaces.

*Refer to Specifications table on page 2 for additional information.


SPECIFICATIONS

ITEM	PARAMETER	VALUE
Electrical	Input Power	2 Watts*
	Input Voltage Range	9-30V DC
	Integrated Driver	✓
	0-100% Dimming	✓
	Protection Features	Transient Protection, Reverse Polarity
Optical	Emitting Angle	120° Full Angle
	LED Color	Cool White, Warm White, Green, Blue, Royal Blue, Cyan, Red, Red-Orange, Amber
	LED Colors per Fixture	1
	Class	Class 2 LED Product
	Physical	Dimensions
Housing Construction		Aluminum, Stainless Steel
Lens Material		Tempered Glass, Frosted
Bezel Shapes		Round, Square, Square/Square
Finishes		PVD Coated: Polished Chrome, Polished Gold, Brushed Nickel Powder Coated: White, Off-White
Mounting Method		Spring Clips, Stainless Steel
Operating Temp. Range		-20°C to 40°C, Max. Case Temp (Tc): 50°C
Humidity		0 to 95%, non-condensing
Environment		Dry, Damp, Wet** (IP67)
Certification		CE 94/25/EC, FCC Part 15, Class B, RoHS Compliant


*Due to constant power design, input current (In) will vary depending on input voltage. Be sure to size wire awg accordingly for worst case input voltage.

**Product is rated for exterior applications, however it is not rated for submersible applications and should not be mounted in conditions where there is, or is a possibility of, standing water. When installing in wet or damp locations, it is good practice to seal all fixtures and junction boxes with electronics grade RTV silicone sealant to ensure that moisture cannot enter or accumulate in wiring compartments, cables, or other electrical parts. Product should not be installed in extreme locations, including but not limited to those outside of its temperature/humidity ratings and/or applications where product is subject to water runoff or downspouts.


DIMENSIONS

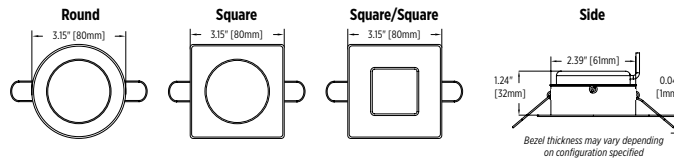

MOUNTING




WIRE FUNCTION



INSTALLATION EXAMPLE

Marine EXAMPLE:
Momentary Switch Dimming via LightLink LL-101.

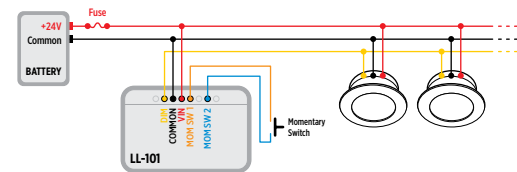

ORDERING NUMBER

FIXED FACTORY NUMBER EXAMPLE: **A1100Z-12HXXX**
 USER SELECTED OPTION Polished Chrome Finish, Square Bezel, Red LED

ACCESSORIES

KEYWORD	ITEM NUMBER	DESCRIPTION	FIXTURE MAX
Trim Ring Extender	3120177-11 (Chrome) 3120177-21 (Gold) 3120177-31 (White) 3120177-41 (Nickel) 3120177-51 (Off-White)	Extends round bezel diameter to 3.75" for retrofit applications requiring a larger bezel.	
LightLink LL-101	LL-101 Series	Dimming Controller, Multiple Interfaces, including Momentary (MOM) Switch Interface.	Dims up to 20 Apeiron A1100
LightLink LL-105	LL-105 Series	Dimming Controller, Multiple Interfaces including 0 to 10V Control.	Dims up to 20 Apeiron A1100
LightLink LL-205	LL-205 Series	Dimming Controller, Multiple Interfaces including 0 to 10V Control.	Dims up to 20 Apeiron A1100
75W Power Supply Enclosure	PS24V75W-E05	Power Supply Enclosure, 75W, 120/240/277VAC Input, 24VDC Output, Steel Enclosure.	Powers up to 20 Apeiron A1100
45W Power Supply Enclosure	PS24V45W-E01D	Power Supply Enclosure, 45W, 120/240VAC Input, 24VDC Output, Steel Enclosure w/ Knockouts & Terminal Blocks.	Powers up to 15 Apeiron A1100
75W Power Supply Enclosure	PS24V75W-E01D	Power Supply Enclosure, 75W, 120/240VAC Input, 24VDC Output, Steel Enclosure w/ Knockouts & Terminal Blocks.	Powers up to 20 Apeiron A1100
75W Outdoor Power Supply Enclosure	PS24V75W-E02	Outdoor Power Supply Enclosure, 75W, 120/240VAC Input, 24VDC x 1 Output, Stainless Steel NEMA 4 Enclosure.	Powers up to 20 Apeiron A1100
150W Outdoor Power Supply Enclosure	PS24V150W-E02	Outdoor Power Supply Enclosure. Dual Power Supply, 75W x 2, 120/240VAC Input, 24VDC x 2 Output, Stainless Steel NEMA 4 Enclosure.	Powers up to 40 Apeiron A1100

A1100Z - * * * **XXX**

Bezel Finish

PVD Coated:

- 1 Polished Chrome
- 2 Polished Gold
- 4 Brushed Nickel

Powder Coated:

- 3 White
- 5 Off-White

Bezel Shape

- 1 Round
- 2 Square
- 4 Square/Square

LED Color

- A Cool White
- C Warm White
- D Green
- E Blue
- F Royal Blue
- G Cyan
- H Red
- J Red-Orange
- K Amber