



# Apeiron™

## MODEL A1161 | DIMMABLE LED DOWNLIGHT

The Apeiron is a damp-location recessed LED downlight capable of being installed in ceilings, soffits, and similar locations. With stainless steel construction and the option for either titanium-coated PVD or mil-spec powder-coated finish, expect a premium finish that will withstand the elements of time.




### FIXTURE BUILDER

A1161Z

#### FIXTURE TYPE

Apeiron



#### FINISH

##### PVD Titanium Coated

- 1 Polished Chrome **Q**
- 2 Polished Gold
- 4 Brushed Nickel **Q**

##### Powder Coated

- 3 White **Q**
- 5 Off-White
- 6 Black

#### BEZEL SHAPE

- 1 Round **Q**
- 2 Square
- 4 Square / Square

#### LED COLOR

- CAA3 Warm White 2700°K **Q**
- CAB2 Warm White 3000°K
- B01L Neutral White 4000°K **Q**
- A00L Cool White 5700°K

#### Q - QUICKSHIP

QuickShip models typically ship within 4 weeks of ordering.

### ACCESSORIES

#### DIMMING CONTROL

##### LIGHTLINK

LL-105-R 0-10V Bridge & Dimmer

Use 1 LL-105-R Dimmer per E05P Power Box.

#### POWER BOXES

##### VOLTAGE

##### POWERS


E05P 75W 120-277V AC 15 Lights

### QUICK SPECS

<b>Input Voltage</b>	9-30V DC, 24V typ.	<b>Humidity</b>	0 to 90% Non Condensing
<b>Input Power</b>	5 Watts	<b>Max. Lights per E05P Power Box</b>	15
<b>Lumens</b>	156 lms typ. @ 4000°K*	<b>Wiring</b>	Each light includes 6 Ft Cable w/ In-Line Connector
<b>Efficiency</b>	39 lms / W typ. @ 4000°K*	<b>Housing</b>	Stainless Steel Trim, Anodized Aluminum Housing
<b>Operating Temp</b>	-20°C to 40°C	<b>Lens</b>	Glass
<b>Max. Case Temp</b>	50°C		


### PHOTOMETRICS

#### APEIRON (A1161Z-11B01L) RESULTS



Mounting Height	fc @ Center Beam	Diameter of Lighted Plane
4.0 ft	6.93 fc	4.32 ft
6.0 ft	3.08 fc	6.47 ft
8.0 ft	1.73 fc	8.63 ft
10.0 ft	1.11 fc	10.8 ft

for lux, multiply by 10.8

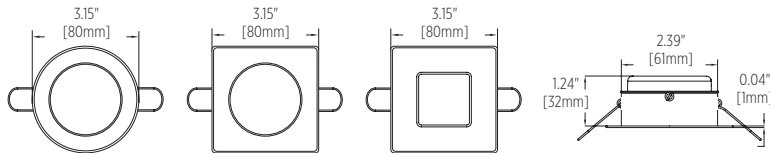

Bezel thickness may vary depending on shape specified

Multiplier Table	2700°K	4000°K	5700°K
Apeiron	x0.80	x1.05	x1.05

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting.



355 Bantam Lake Rd.  
Morris, CT 06763 USA

www.i2Systems.com

tel +1.860.567.0708  
fax +1.860.567.2501

sales@i2Systems.com

© 2013 Integrated Illumination Systems, Inc. All Rights Reserved. i2Systems, the i2Systems Logo and Apeiron are either registered trademarks or trademarks of i2Systems. Due to ongoing improvement and innovation, product details and specifications are subject to change without notice.