


i2Systems™

Simply
Advanced.™

★★★★★
MADE IN THE
USA

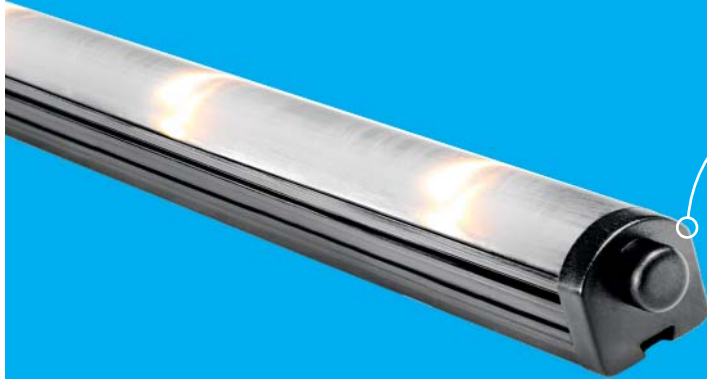

**WIDE LATERAL
THROW**
Patented optical
system eliminates
socket shadow

ONLY 3/4" THICK
Rugged design,
advanced
features



Gen5™ Elevator

DIMMABLE LED LINEAR LUMINAIRE

The Gen5 Elevator is a dimmable, commercial-grade LED luminaire designed for the illumination of elevator coves and ceilings. Each light comes with an integrated 6 foot cable with in-line connector at the light.



FEATURES

A Perfect Blend

Patented optical system provides close-to-fixture illumination with short mixing distance and blended color. Eliminates socket shadow.

Simple Dimming

Using our LightLink™ Dimmers, experience simple LED dimming at the push of a button.

Plug & Play Hookup

Convenient cabling makes connections between fixtures and the power box easy and fast.

Simple Power

i2Systems all-in-one E01D power box powers up to 20 feet of Gen5 Elevator fixtures with outstanding performance.

Rugged Design

Impact-resistant polycarbonate optic and anodized aluminum construction ensure product longevity.

Snap-In Mounting

Adjustable, fixed and end-mount pivot brackets make mounting simple.



Typical Applications

- Elevator Perimeter
- Elevator Cove

Quick Specs

4W	Power / Foot
180	Lumen Output / Foot Typ
65°	Beam Angle

LED Color

- 3000°K Warm White
- 4000°K Neutral White

Housing

- Black Mil-Spec Anodized Aluminum

Mounting

Adjustable, Fixed & Pivot Mounts



Gen5™ Elevator

MODEL S1205 | LED LINEAR ELEVATOR COVE LUMINAIRE

The Gen5 Elevator is a dimmable, commercial-grade LED luminaire designed for the illumination of elevator coves and ceilings. Each light comes with an integrated 6 foot cable with in-line connector at the light.

US 8,255,487 | US 8,264,172
Additional Patents Pending



CUSTOMER COMPANY	CUSTOMER CONTACT
P.O. #	CUSTOMER PHONE #
NEED-BY DATE	ONCE COMPLETE SEND TO

FIXTURE BUILDER

S1205	B	-		6		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-------	---	---	--	---	--	--------------------------	--------------------------	--------------------------	--------------------------	--------------------------

FIXTURE TYPE

Gen5 Elevator

OUTPUT

B 4W / Ft

LENGTH

- 1** 12"
- 8** 18"
- 2** 24"
- 3** 36"
- 4** 48"

BEAM ANGLE

6 65°

LED COLOR

- CBB** Warm White 3000°K
- BBD** Neutral White 4000°K

12" 18" 24" 36" 48"

KIT COMPOSITION

Specific quantity of each length.
Maximum 20 feet per power box.

NUMBER OF KITS

Specific quantity of kits
(number of cabs) for this order.

ACCESSORIES

DIMMER

LIGHTLINK

LL-101-01 Push Button Dimmer w/ Memory

The LightLink dimmer plugs directly into the power box to enable dimming control.

POWER BOXES

E01D POWER BOX

PS24V75W-E01D 75W 120-240V AC 20 ft

The E01D power box powers up to 20 feet of Gen5 Elevator fixtures.

BRACKETS

BRACKETS

SLA-1 Adjustable*

SLA-2 Fixed*


SLA-3 End Mount Pivot

*Use 2 brackets per 12", 18", 24" and 36" Gen5 Elevator fixture.
Use 3 brackets per 48" Gen5 Elevator fixture.

QUICK SPECS

Input Voltage	24V DC	CRI	85 typ.
Power / Ft	4 Watts	Max. Lights per Power Box	20 Feet
Lumens / Ft	180 lms typ.	Wiring	Each light includes 6 foot cable w/ in-line connector and ferrules
Efficiency	47 lms / W typ.	Housing	Mil-Spec Anodized Aluminum
Operating Temp	-20°C to 40°C	Lens	Impact Resistant Polycarbonate
Max. Case Temp	50°C		
Humidity	0 to 95% Non Condensing		

12.43" [316mm]	
18.43" [468mm]	
24.43" [621mm]	
36.43" [926mm]	
48.43" [1230mm]	



PRODUCT TIPS

WIDE BEAM

The Gen5 Elevator's light beam offers a very wide throw along its length. This ensures there is no 'socket shadow' or dark spots between lights.

IN-LINE CONNECTOR

Each Gen5 Elevator includes a 6 foot cable with an in-line connector 6 inches back from the fixture. The cable is terminated with ferrules that offer simple installation into i2Systems Power Box.

ADJUSTABLE

Adjustable brackets above allow the Gen5 Elevator to be mounted flat to elevator drop ceiling and pivoted.

DIMMING

Where dimming is required, simply plug an i2Systems LightLink into the i2Systems Power Box and dimming is enabled. See above for model numbers.

For complete technical information refer to the Gen5 Elevator Installation Guide available at www.i2Systems.com



Simply Advanced.™

Integrated Illumination Systems, Inc.
355 Bantam Lake Road
Morris, CT 06763 USA

tel +1.860.567.0708
fax +1.860.567.2501
sales@i2Systems.com

Product information is subject to change without notice.
All brand names and product names are trademarks of i2Systems.
© 2015 i2Systems. All Rights Reserved.

www.i2Systems.com